

URKUNDE

Es wird hiermit bescheinigt,
dass für die in der Patentschrift
beschriebene Erfindung ein
europäisches Patent für die in der
Patentschrift bezeichneten Ver-
tragsstaaten erteilt worden ist.

CERTIFICATE

It is hereby certified that a
European patent has been granted
in respect of the invention
described in the patent specifica-
tion for the Contracting States
designated in the specification.

CERTIFICAT

Il est certifié qu'un brevet
européen a été délivré pour
l'invention décrite dans le
fascicule de brevet, pour les
Etats contractants désignés
dans le fascicule de brevet.

Europäisches Patent Nr.

European patent No.

Brevet européen n°

1714031

Patentinhaber

Proprietor of the patent

Titulaire du brevet

**McNichol, Richard Frederick
181A Street, Unit 5884
Surrey, British Columbia V3S 4T2/CA**

München, den
Munich,
Fait à Munich, le


09.12.09



Alison Brimelow

Präsidentin des Europäischen Patentamts
President of the European Patent Office
Présidente de l'Office européen des brevets

(19)



(11)

EP 1 714 031 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
09.12.2009 Bulletin 2009/50

(51) Int Cl.:

F04B 9/107 (2006.01)**F04B 47/08 (2006.01)****F04B 47/10 (2006.01)**

(21) Application number: **05706422.2**

(86) International application number:
PCT/CA2005/000096

(22) Date of filing: **27.01.2005**

(87) International publication number:
WO 2005/073555 (11.08.2005 Gazette 2005/32)

(54) **HYDRAULIC RAM PUMP**

HYDRAULIKZYLINDERPUMPE**POMPE HYDRAULIQUE REFOULANTE**

(84) Designated Contracting States:

**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU MC NL PL PT RO SE SI SK TR**

• **BRYCE, Gordon**

Whiterock, British Columbia V4B 4X8 (CA)

(30) Priority: **29.01.2004 US 765979**

(43) Date of publication of application:
25.10.2006 Bulletin 2006/43

(74) Representative: **Nellson, Martin Mark
Urquhart-Dykes & Lord LLP
Tower North Central
Merrion Way
Leeds LS2 8PA (GB)**

(73) Proprietor: **McNichol, Richard Frederick
Surrey, British Columbia V3S 4T2 (CA)**

(56) References cited:

WO-A1-84/01002	CA-A1- 1 041 371
CA-A1- 1 057 121	CA-A1- 1 198 315
FR-A- 2 545 886	GB-A- 631 521
US-A- 1 616 774	US-A- 2 174 114
US-A- 3 135 210	US-A- 4 219 311
US-A- 4 421 463	US-B1- 6 193 476

(72) Inventors:

• **MCNICHOL, Richard Frederick
Surrey, British Columbia V3S 4T2 (CA)**

EP 1 714 031 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] This invention relates to pumps, and in particular to piston type pumps for pumping liquids to significantly higher elevations and pumps having energy recovery means.

5 [0002] Pumping liquids against substantial hydraulic heads is a problem encountered in pumping out mines, deep wells, and similar applications such as pumping water back up, over a hydro dam during low energy usage periods, for subsequent recovery during high energy usage periods, and for use in run-of-the-river hydro power applications utilizing the potential energy of water in a standing column.

10 [0003] A number of earlier patents attempt to provide devices which utilize piston type pump where energy is recovered from a column of liquid acting downwardly on the piston, as the piston moves downwardly, in order to assist in subsequently raising the piston together with a volume of liquid to be pump upwardly. An example of such an earlier patent is United States Patent No. 6,193,476 to Sweeney. However such earlier devices have not been efficient enough to justify their commercial usage. For example, in the Sweeney patent, the efficiency of the apparatus is significantly reduced due to the fact that the upper piston 38 has the same cross-sectional area as lower piston 43. Thus the pressure of liquid acting

15 upwardly on the lower piston 43 inhibits downward movement of the upper piston 38 under the weight of the liquid in the cylinder above. US4421463 describes a pump for vertically transporting fluid comprising a bucket having an annular fin and located above a reload chamber with the bottom of the bucket having a one way valve, and a plunger located within the bucket and attached to the housing wall, the plunger also having a one way valve. To operate the pump, an external pump is required to apply cyclic positive and negative hydraulic pressure in the reload chamber which causes the bucket to rise and fall relative to the plunger.

20 Thus, document US 4 421 463 discloses only some of the features of the invention, namely a piston type pumping apparatus having a vertically oriented cylinder, a first passageway for liquid in the cylinder at the top thereof and a second passageway for liquid in the cylinder at the bottom thereof, a piston reciprocatingly mounted within a cylinder, a hollow piston rod and a reload chamber with a one-way valve.

25 US2174114 describes a deep well pump having two pumping lines connected to a reciprocating piston pump located above ground and a valve assembly located at the cotermious ends of the pipes in the well. The valve assembly is such that fluid is pumped up one of the pipes on the fore stroke and the other on the back stroke.

30 It is an object of the invention to provide an improved pumping apparatus capable of pumping liquids against significant hydraulic heads, such as encountered in deep wells or in pumping out mines, without requiring pumps with high output heads.

It is a further object of the invention to provide an improved piston type pumping apparatus with provision for energy recovery, having significantly improved efficiency compared with prior art devices of the general type as well as the ability to use the potential energy of a standing column.

35 [0004] It is still further object of the invention to provide an improved piston type pumping apparatus which is simple and rugged in construction, and efficient to operates and install.

SUMMARY OF THE INVENTION

40 [0005] A piston type pumping apparatus, comprising: a vertically oriented cylinder having a top and a bottom, the bottom having a first aperture; a first passageway for liquid in the cylinder at the top thereof; a second passageway for liquid in the cylinder at the bottom thereof; a piston reciprocatingly mounted within the cylinder and having a top area against which pressurized fluid acts in a direction of movement of the piston; a hollow piston rod connected to the piston and extending below the piston and slidably and sealingly through the first aperture in the bottom of the cylinder; a reload chamber located below the cylinder, the piston rod extending slidably and sealingly into the reload chamber through a second aperture and having a third passageway for liquid communicating with the reload chamber, the piston rod having a smaller bottom area within the reload chamber upon which pressurized fluid in the reload chamber acts in the direction of movement of the piston and piston rod compared to the top area of the piston, so that liquid in the cylinder acting on the piston when the apparatus is in use exerts a greater force on the top area of the piston than liquid in the reload chamber acting against the smaller bottom area of the piston rod; a first one-way valve located in the third passageway which permits liquid to flow from the reload chamber into and above the piston rod and prevents liquid from flowing back through the piston rod into the reload chamber; a fourth passageway for liquid extending from the reload chamber to a source chamber; a second one-way valve in the fourth passageway which permits liquid to flow from the source chamber into the reload chamber and prevents liquid from flowing from the reload chamber towards the source chamber; and a receiver for storing hydraulic liquid connected to the second passageway for storing pressurized liquid displaced below the piston, as the piston moves downwardly, and to assist in raising the piston and, accordingly, liquid contained within the piston rod, to pump liquid upwardly and through the first passageway

55 [0006] For example, the means for storing may include a pressurized body of liquid.

[0007] There may be a pump connected to the body of liquid for pumping liquid into the cylinder below the piston to raise the piston.

[0008] In one example the pump is a piston pump. The body of liquid may be a vertical column of liquid

5 [0009] In another example, the pump may be a rotary pump and the means for storing may include a receiver for pressurized liquid connected to the pump.

[0010] The invention offers significant advantages compared with conventional pumps for deep wells, pumping out mines and other applications for pumping liquids up relatively high hydraulic heads, such as energy recovery at hydro dams. It allows the use of a pump which requires far less energy input to pump liquids up significant vertical distances because it converts the potential energy of the standing column into kinetic energy. At the same time, it overcomes 10 disadvantages associated with prior art pumps of the general type by increasing its efficiency significantly by comparison. Thus the invention is attractive for commercial applications where prior art devices have not proven to be viable.

BRIEF DESCRIPTION OF THE DRAWING

15 [0011] In the drawings:

Figure 1 is a simplified elevational view, partly in section, of a pumping apparatus according to an embodiment of the invention;

20 Figure 2 is a simplified elevational view, partly in section, of the upper fragment of an alternative embodiment employing a centrifugal pump;

Figure 3 is a graph of the efficiency of the pressure head concept of the pump;

25 Figure 4 is a sectional view of the embodiment of Figure 1 showing the Force Balance in the pump;

Figures 5a and 5b are simplified sectional views showing Pressure Head Concept of a pump and the Power Cylinder Concept of the pump.

30 Figures 6a and 6b are simplified elevational views, partly in section, of a pumping apparatus shown in a power stroke and a recovery stroke respectively according to another embodiment of the invention.

DETAILED DESCRIPTIONS OF THE PREFERRED EMBODIMENTS

35 [0012] Referring to the drawings, and first to Figure 1, this shows a piston type pumping apparatus 20 according to an embodiment of the invention. The apparatus is intended to pump liquids, typically water, up relatively great vertical distances, such as from the bottom of a mine to the surface as exemplified by the distance between points 22 and 24. The system includes a vertically oriented first transfer cylinder 26 having a top 28, adjacent point 24, and a bottom 30. There is a first passageway 32 for liquid adjacent the top where liquid is discharged from the cylinder. There is a second 40 passageway 34 near the bottom of the cylinder which allows liquid to enter or exit the cylinder.

[0013] A transfer piston 40 is reciprocatingly mounted within the cylinder and is connected to a vertically oriented, hollow piston rod 42 which extends slidably and sealingly through aperture 44 in the bottom of the cylinder. The piston 40 has an area 29 at the top thereof against which pressurized fluid in the cylinder acts. The passageway 32 is above or adjacent to the uppermost position of the piston and the passageway 34 is below its lowermost position. It should be 45 understood that Figure 1 is a simplified drawing of the invention and seals and other conventional elements which would be apparent to someone skilled in the art are omitted. These components would be similar to those disclosed in United States Patent No. 6,193,476.

[0014] There is a first one-way valve 41 at the bottom of the piston rod 42 which includes a valve member 43 and a valve seat 45 which extends about a third passageway 47 in bottom 49 of the piston rod. This one-way valve allows 50 liquid to flow into the piston rod, but prevents a reverse flow out the bottom of the piston rod.

[0015] There is a reload chamber 46 below the cylinder 26 which is sealed, apart from aperture 48 at top 50 thereof, which slidably and sealingly receives piston rod 42, and fourth passageway 52 at bottom 54 thereof. The piston rod acts as a piston within the reload chamber. There could be a piston member on the end of the rod within the reload chamber and the term "piston rod" includes this possibility. A second one-way valve 56 is located at the passageway 52 and 55 includes a valve member in the form of ball 58 and a valve seat 60 adjacent to the bottom of the reload chamber. There is an annular stop 62 which limits upward movement of the ball. This one-way valve allows liquid to flow from a source chamber 70 into the reload chamber 46, but prevents liquid from flowing from the reload chamber towards the chamber 70. Chamber 70 contains liquid to be pumped out of passageway 32 at top of the cylinder.

[0016] The piston 40 has a diameter D1 which is substantially greater than diameter D2 of the piston rod and, according, the piston rod, acting as a piston in the reload chamber, has a significantly smaller area upon, which pressurized liquid acts, in the direction of movement of the piston rod and piston 40, within the reload chamber 46 compared to the cross-sectional area of the piston 40 and the inferior of cylinder 26. For example, in one embodiment the piston is 3" in diameter, while the piston rod 42 is 1" in diameter. Therefore liquid in the cylinder at a given pressure exerts a much greater force on the piston and piston rod compared to the force exerted upwardly on the piston rod and piston by a similar pressure of liquid in reload chamber 70.

[0017] There is means 80 for storing pressurized liquid 82 connected to the second passageway 34. This means 80 stores pressurized liquid recovered from chamber 90 in the cylinder 26 below the piston 40. In this particular embodiment the means includes a column of liquid 92 extending from passageway 34 to a point 94 at the top of the column. The column in this example is formed by an annular jacket 96 extending about the cylinder 26 and a conduit 98 extending to discharge end 100 of a second, power cylinder 102. The column can be pressurized by a remotely located power cylinder or by using a body of liquid (water), located at a higher elevation, as a pressure head.

[0018] The cylinder 102 has a piston 104 reciprocatingly mounted therein. The liquid 82 occupies chamber 106 on side 108 of the piston which faces discharge end 100 of the cylinder. Chamber 110 on the opposite side of the piston is vented to atmosphere through passageway 112. There is, a piston rod 114 connected to the piston 104 to drive the piston towards the discharge end and thereby discharge liquid 82 from the cylinder.

[0019] In operation, the cylinder 26 is filled with liquid, typically water, above the piston 40. Likewise chamber 90 is filled with water along with the jacket 96 and chamber 106 of the second cylinder 102. Similarly piston rod 42 is filled with water or other liquid along with the reload chamber 46 and the source chamber 70. The piston is in the lowermost position as shown in Figure 1. This is required to prime the pump.

[0020] The piston rod 114 is then moved to the left, from the point of view of Figure 1, typically by a motor or engine with a crank mechanism or a pneumatic or hydraulic device, although this could be done in other ways. This displaces liquid 82 from the cylinder 102 downwardly through the column 92, through the second passageway 34 into the chamber 90 where it acts upwardly against the bottom of piston 40 and pushes the piston upwards in the cylinder 26.

[0021] The piston rod 42 is pushed upwardly along with the piston and thereby reduces pressure in reload chamber 46, since the volume occupied by the piston rod in the reload chamber is reduced as the piston rod moves upwardly. One-way valve 41 prevents liquid from flowing from the piston rod into the reload chamber, but the reduced pressure within the reload chamber causes ball 58 to rise off of its seat 60, such that liquid flows from chamber 70 into the reload chamber.

[0022] When piston 104 of the cylinder 102 approaches the end of its travel adjacent discharge end 100, and piston 40 approaches its uppermost position towards top 28 of the cylinder 26, liquid is discharged from the passageway 32. When the piston 104 has reached its limit adjacent discharge end 100, pressure against piston rod 114 is released. The weight of liquid occupying cylinder 26 above the piston 40 acts downwardly on the piston and forces the piston towards its lowermost position shown in Figure 1. This forces liquid out of chamber 90 and into the chamber 106 of cylinder 102, moving the piston 104 to the right, from the point of view of Figure 1, so it returns to the original position shown.

[0023] At the same time, the piston rod 42 is forced downwardly into the reload chamber 46. This increases pressure in the reload chamber and keeps the ball 58 against valve seat 60 to prevent liquid from flowing back into the source chamber 70 through the passageway 52. The liquid in the reload chamber is thus forced upwardly into the piston rod 42 by raising valve member 43 off of valve seat 45. In this way, a portion of the liquid in reload chamber 46, which had flowed into the reload chamber from the source chamber as the piston was previously raised, moves from the reload chamber into the piston rod and refills the cylinder 26 above the piston 40 as the piston moves downwardly towards its lowermost position shown in Figure 1.

[0024] The piston 104 in the cylinder 102 is then pushed again to the left, from the point of view of Figure 1, and again raises the piston 40. A volume of liquid equal to the volume of liquid which moved into the piston rod 42 from the reload chamber 46, as the piston 40 previously moved downwards, is then discharged from 32 as the piston 40 approaches its uppermost position and piston 102 approaches its position closest to the discharge end 100 of cylinder 102.

[0025] The cycles are then continued and, as may be readily understood, each time the piston 40 moves down and back up, it pumps a volume of liquid from the reload chamber 46, and ultimately from source chamber 70, equal to the difference in volume occupied by the piston rod 44 within the reload chamber 46, when the piston 40 is in the lowermost position as shown in Figure 1, less the volume it occupies within the reload chamber (if any) when the piston 40 has reached its uppermost position. The travel of the piston 40 is adjusted so that the piston rod remains within the aperture 48 at the uppermost limit of travel of the piston 40 and piston rod.

[0026] The pump apparatus described above is capable of pumping liquid from point 22 to point 24 as described above. Thus the apparatus is capable of pumping liquid against a significant hydraulic head, such as experienced in pumping water from the bottom of a mine, without requiring a pump with a high hydraulic head output. This is because liquid in column 92 acts upwardly against the bottom of the piston 40 and assists the movement of the piston 104 towards the left, from the point of view of Figure 1. When the piston 40 is moved downwardly by the weight of liquid in cylinder

26 above the piston, it moves the liquid in chamber 90 upwardly, increasing its hydraulic head and building up its potential energy. Thus a large portion of the energy lost as the piston 40 moved downwardly is recovered in potential energy represented by the liquid in column 92 extending to cylinder 102.

[0027] Thus it may be seen that the cylinder 102 should be placed as high as possible for the maximum recovery of the energy. It should be understood that the position of cylinder 102 could be different than shown in Figure 1. It could be, for example, oriented vertically. The terms "left" and "right" used above in relation to the cylinder, piston and piston rod are to assist in understanding the invention and are not intended to cover all possible orientations of the invention.

[0028] Figure 2 shows a pumping apparatus 20.1 which is generally similar to the apparatus shown in Figure 1 with like parts having like numbers with the addition of ".1". It is herein described only with respect to the differences between the two embodiments. Only the upper portion of the apparatus is shown, the reload chamber and source chamber being omitted because they are identical to the first embodiment. In this example passageway 34.1 is fitted with a one-way valve 120 which permits liquid to flow from chamber 90.1 into conduit 122, but prevents liquid from flowing in the opposite direction. The conduit 122 is connected to a receiver 124 which may be similar in structure to a hydraulic accumulator, for example, and is capable of storing pressurized hydraulic fluid. When the piston 40.1 is moved downwardly by the liquid in cylinder 26.1, it is forced into the receiver 124.

[0029] There is a hydraulic conduit 126 which connects the receiver to a centrifugal pump 128 which is connected to passageway 130 in the cylinder 26.1 below the piston 40.1 via a conduit 132. After the piston reaches its bottommost position, as shown in Figure 2, pump 128 is started to pump liquid from the receiver 124 into the chamber 90.1 to lift the piston 40.1. The fact that the liquid in the receiver 124 was pressurized during the previous downward movement of piston 40.1 reduces the work required from pump 128 to assist in raising the piston. Thus this apparatus operates in a manner analogous to the embodiment of Figure 1, but uses the receiver to store pressurized hydraulic fluid instead of utilizing a physical, vertical hydraulic head as in the previous embodiment. Furthermore a centrifugal pump 128 is employed instead of the piston pump comprising cylinder 102 and piston 104 of the previous embodiment. Otherwise this apparatus operates in a similar manner.

ANALYSIS OF PRESSURES AND FORCE BALANCE

[0030] Referring to Figures 1 through 5:

A_1 is the area of the top 29 of the piston 40 which is the area of the transfer cylinder 26

A_2 is the area of the bottom of the piston rod 42

$A_1 - A_2$ is the area of the transfer piston in with the power fluid

S is the stroke length

P_1 is the pressure of the standing column

P_2 is the pressure of the working fluid during the power stroke

P_3 is the available head of the fluid to be pumped

P_4 is the pressure in the transfer chamber 200

P_5 is the pressure of the power fluid during the recovery stroke

P_6 is the pressure created in the power cylinder 102 located at the same level as the standing column discharge 32

W is the weight of the piston

R is the resistance created by the seals

d is the density of water (0.036 lbs/in³)

A_c is the area of the Power Cylinder

S_c is the stroke of the Power Cylinder

H is the height of the standing column of water

[0031] During the recovery stroke the transfer piston moves down, with valve member 43 open and valve 56 closed.

$$\text{Downward Forces } F_d = P_1 A_1 + W$$

$$\text{Upward Forces } F_u = P_2 (A_1 - A_2) + P_4 A_2 + R$$

$$\text{Net force } F = F_d - F_u = P_1 A_1 + W - P_2 (A_1 - A_2) - P_4 A_2 - R$$

5 If we assume:

$P_1 = 3,10 \text{ bar}$, $A_1 = 0,0052 \text{ m}^2$ ($P_1 = 45 \text{ psig}$, approximately 100 feet of water, and $A_1 = 8 \text{ in}^2$),
 $P_1 A_1 = 1600 \text{ N}$ ($P_1 A_1 = 45 \times 8 = 360 \text{ lbs}$)

- 10 - a piston weight of 2lbs (approximately 8 in³ of steel)
 - a seal resistance 20 lbs

$P_4 = P_1$ and therefore $P_4 A_2 = P_1 A_2$

15

$$F = P_1 A_1 - P_1 A_2 - P_2 (A_1 - A_2) - R$$

20

$$F = P_1 (A_1 - A_2) - P_2 (A_1 - A_2) - R = (P_1 - P_2) (A_1 - A_2) - R$$

For this to be a net downward force, P_2 must be less than P_1 . The area that P_1 operates on is $(A_1 - A_2)$.
 [0032] During the power stroke the transfer piston moves up and valve member 43 closed.

25

$$\text{Downward forces } F_d = P_1 A_1 + W + R$$

30

$$\text{Upward forces } F_u = P_2 (A_1 - A_2) + P_4 A_2$$

Net force = $F = F_u - F_d = P_2 (A_1 - A_2) + P_4 A_2 - P_1 A_1 - W - R$
 $P_4 = P_3$. If we assume $P_3 \ll P_1$ or P_2 , we can ignore $P_4 A_2$.
 As for the recovery stroke we can ignore W .

35

$$F = P_2 (A_1 - A_2) - P_1 A_1 - R$$

40 Efficiency

Work in during the recovery stroke

45 [0033] $P_3 = P_1 - P_0$ where P_0 is the pressure created in the power cylinder located at the same level as the standing column discharge.

Work done at the power cylinder

[0034]

50

$$W_i = P_c A_c S_c$$

55 $A_c S_c$ is the volume of power fluid moved per stroke = $(A_1 - A_2) S$

$$W_i = P_c(A_1 - A_2)S_i$$

For example, $P_c = 0,97$ bar, $A_1 = 0,0052\text{m}^2$, $A_2 = 0,0026\text{m}^2$, $S = 0,305\text{m}$ ($P_c = 14$ psig, $A_1 = 8\text{ in}^2$, $A_2 = 4\text{ in}^2$, and $S = 12\text{ in}$)
 $W_i = 76\text{Nm}$ ($W_i = 14(8-4)12 = 672\text{ in lbs}$ (56 ft lbs) plus $R \times S \times 20 \times 12 = 240\text{ in lbs}$)

$$A_2/A_1 = 0.5$$

Work in during the Power Stroke

[0035] $P_2 = P_1 + P_c$. In order to create an acceleration of "a" times g (32.2 ft/sec²) in the standing column, the net force must be "a" times the weight of the standing column.

$$F = P_2(A_1 - A_2) - P_1A_1 - R = aHA_1d = aP_1A_1$$

$$(P_1 + P_c)(A_1 - A_2) - P_1A_1 - R = aP_1A_1$$

$P_1A_1 - P_1A_2 + P_cA_1 - P_cA_2 - P_1A_1 - R = aP_1A_1$. The bold terms cancel.

$$P_c(A_1 - A_2) = aP_1A_1 + P_1A_2 + R$$

$$P_c = \frac{P_1(aA_1 + A_2)}{(A_1 - A_2)} + \frac{R}{(A_1 - A_2)}$$

For a head of 30,5m (100 feet) $P_1 = 299000\text{N/m}^2$ (43.3 psig) and $a = 1$ g, $R = 89\text{N}$ (20 lbs) $P_c = 9,32$ bar.

$$\left(P_c = \frac{43.3(1 \times 8 + 4)}{4} + \frac{20}{4} = 130 + 5 = 135 \text{ psig} \right)$$

Work In at the power cylinder

[0036] $W_i = P_c(A_1 - A_2)S = 732\text{N}$

$$(W_i = P_c(A_1 - A_2)S = 135 \times 4 \times 12 = 6480 \text{ in lbs})$$

Work Output

[0037] The amount of water lifted is $SA_2d = 0,20\text{ N}$ ($SA_2d = 12 \times 4 \times 0.036 = 1.73\text{ lbs}$) it is raised 30,5m (1200 inches)
 $W_o = 234\text{ Nm}$

$$(W_o = 1/73 \times 1200 = 2070 \text{ in lbs} = 173 \text{ ft lbs})$$

Efficiency based on A_2/A_1 ratio of 0.5

$$E = W_0 / W_1 = 2070 / (6480 + 672 + 240) = 28.0\%$$

By examining the above formula for P_c one can see how changing the acceleration and the ratio of A_2/A_1 affects the pressure necessary to drive the pump. For example:

$A_2/A_1 = 0.8$ or in the example A_2 would now = 0.041m^2 (6.4 sq. in).
and $a = 0.25\text{ g}$

$$P_c = \frac{P_1(a A_1 + A_2)}{(A_1 - A_2)} + \frac{R}{(A_1 - A_2)}$$

$P_c = 16.5\text{ bar}$

$$\left(P_c = \frac{43.3(0.25 \times 8 + 6.4)}{1.6} + \frac{20}{1.6} = 227 + 12.5 = 239.5\text{ psig} \right)$$

or using a lower A_2/A_1 ratio - say 0.25, now $A_2 = 2$ and leaving acceleration at 0.25g

$$P_c = \frac{P_1(a A_1 + A_2)}{(A_1 - A_2)} + \frac{R}{(A_1 - A_2)}$$

$P_c = 2.16\text{ bar}$

$$\left(P_c = \frac{43.3(0.25 \times 8 + 2)}{6} + \frac{20}{6} = 28 + 3.33 = 31.33\text{ psig} \right)$$

We are now moving a volume of water up 30.5m (100 feet) in our example by adding 216000N/m^2 (31.33 psi (72.37 ft.)) of head to the power column.

DYNAMIC ANALYSIS OF THE ORIGINAL CONCEPT

Recovery Stroke

[0038] Continuing with the same example the net force on the Standing Column 26 is:

$$F = P_c(A_1 - A_2) - R = 160\text{N} = (4(8 - 4) - 20 = 36\text{ lbs})$$

The mass of the Standing Column is

$$1540\text{N} (1200 \times 8 \times 0.036 = 346\text{ lbs})$$

The acceleration is

$$36/346 = 0.10 \text{ g} = (3.22 \text{ ft/sec}^2)$$

5 The time required to complete the stroke

$$D = \frac{at^2}{2} : D = S \left(\text{in feet} = 1 \text{ foot} \right)$$

10

$$t = (2S/a)^{0.5} = (2/3.22)^{0.5} = 0.79 \text{ seconds}$$

15 Power Stroke

[0039] The acceleration was defined as 1g (or 32.2 ft/sec²)

20

$$t = (2/32.2)^{0.5} = 0.25 \text{ seconds.}$$

The complete stroke will take 0.79 + 0.25 = 1.03 seconds

25 [0040] The above analysis of pressures and force can be manipulated using different ratios of A_2/A_1 , P_2/P_1 and acceleration "a".

[0041] Attached as Figure 3 is a performance curve for the pressure head concept showing the efficiency against the ratio A_2/A_1 . Also included as Table 1 are the calculations from which Figure 3 is drawn showing the absolute numeric variations as parameters are changed.

[0042]

30

Table 1

Efficiency vs A2/A1						
A2/A1=	0.4	05	0.6	0.7	0.8	0.82
P2/P1						
1.5	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%
1.8	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%
2.0	41.4%	0.0%	0.0%	0.0%	0.0%	0.0%
2.5	31.6%	45.7%	0.0%	0.0%	0.0%	0.0%
3.0	25.5%	372%	533%	0.0%	0.0%	0.0%
4.0	18.5%	27.1%	39.3%	59.1%	0.0%	0.0%
5.0	14.5%	21.3%	31.2%	47.1%	0.0%	0.0%
7.5	9.4%	13.9%	20.5%	31.3%	53.7%	61.1%
10	6.9%	10,3%	15,3%	23,5%	40,2%	45,8%
Optimum	26,6%	315%	36,0%	40,7%	46,3%	47,5%
P5/P1 , req	0,39	0,31	0,185	0,05	0,05	0,05
Rec Acc m/sec2	2,45	2,44	2,45	2,20	1,28	1,10
(Rec Acc ft/sec2)	(8,04)	(8,01)	(8,04)	(7,21)	(4,21)	(3,61)

55

(continued)

Efficiency vs A ₂ /A ₁						
P ₂ /P ₁ opt	2,9	3,48	4,35	5,79	8,69	9,65

[0043] For the pressure head concept, the curves demonstrate that a pump could approach an efficiency of up to 61% if used in applications where a very high pressure head is available and the power water can be discharged at a very low level, both compared to the height of the standing column. Efficient pump designs have a high A_2/A_1 ratio indicating that the volume of water discharged from the stranding column is greater than the volume of water used on the power side of the transfer piston. This feature indicates that the pump may be attractive in lifting water from a well or de-watering a mine as long as there is a convenient source of suitable power water; i.e. compatible with the water to be lifted and having a very high head. As previously discussed, a pressure head pump could be attractive in some run-of-the-river hydro applications if a suitable source of power water is convenient.

[0044] For the power cylinder concept, the curves indicate that the higher the A_2/A_1 ratio the more efficient the pump, and the lower the accelerations the more efficient the pump.

[0045] Efficient pressure head concept pumps move a greater volume of process water per stroke than the volume of power water required. This again is a direct result of the high ratios of A_2/A_1 . This means that the power water could be released to join the process water and still allow effective pumping to occur. Conversely, pumps with low ratios of A_2/A_1 but with a large amount of power water and a lower head can move smaller amounts of process water up greater heights. They will expend more power water than the process water they move. This process is similar to the classic hydraulic ram principle where a large amount of fluid at a low pressure head is used to transfer a small amount of fluid up a higher elevation.

[0046] A different embodiment of the pump utilizes a bladder similar to a pressure tank in a water system or a packer similar to a drill hole packer that houses the water in the power cylinder that is pressurized by air or hydraulic pressure and then the pressure lowered and again repressurized. This allows the use of the pump without expending the power fluid.

ANALYSIS

[0047] Figure 5 shows the two main embodiments of the pump. Figure 5A describes the pressure head concept showing how the liquid, generally water, stored at a higher elevation 83 supplies excess pressure for the power stroke 85 and reduced pressure 87 when point 89 is used for the power fluid release. Figure 5B shows the power cylinder concept where the excess pressure is generated by the power cylinder 102 and the recovery stroke is augmented by the creation of a vacuum when piston 104 is withdrawn from the column of power fluid.

PERFORMANCE CURVES

Pressure Head Concept

[0048] Referring to Table 1, the valves were manipulated to calculate the efficiency of various pressure head arrangements. The manipulation required:

- setting various ratios of A_2/A_1 from 0.4 to 0.82 then, for each of the ratios,
- calculating the recovery stroke performance for various ratios of P_5/P_1 (the height of the power water release compared to the standing column height),
- "optimising" P_5/P_1 to obtain a recovery stroke acceleration of 24m/sec² (8 ft/sec²), if possible,
- using the "optimised" results from the recovery stroke calculations as input for the power stroke calculations,
- calculating the power stroke performance for various ratios of P_2/P_1 (the height of the power water source compared to the standing column height),

EP 1 714 031 B1

- "optimising" P_2/P_1 was to obtain a power stroke acceleration of 24m/sec^2 (8ft/sec^2),
- transferring the calculated efficiencies to another spreadsheet along with the "optimised" P_5/P_1 and P_2/P_1 ratios and the recovery stroke acceleration,
- using the calculated efficiencies to plot a graph of efficiency vs A_2/A_1 for the most significant ratios of P_2/P_1 .

[0049] The results indicated that high ratios of A_2/A_1 result in higher efficiency and low acceleration. The results also indicate that a low ratio of P_5/P_1 is required to create reasonable recovery stroke acceleration.

[0050] Referring to Table I, performance data for the ratio $A_2/A_1 = 0.82$ is shown which indicates that an efficiency of 61% could be achieved if a power stroke acceleration of $2,44\text{m/sec}^2$ ($8, \text{ft. sec}^2$) ($0.25g$) is considered acceptable. The recovery stroke acceleration will be around $1,2\text{m/sec}^2$ (4 ft/sec^2) with this design.

[0051] What is not immediately apparent is that when the A_2/A_1 ratio is high, the amount of power water released per stroke is much less than the amount of process water lifted per stroke. The amount of process water lifted per stroke is A_2S and the amount of power water released per stroke is $(A_2 - A_1)S$.

[0052] When $A_2/A_1=0.8$:

$$(A_2 - A_1) = A_1 - 0.8A_1 = 0.2A_1$$

and the amount of power water released per stroke is

$$(A_2 - A_1)S = 0.2 A_1S$$

and $A_2 = 0.8A_1$:

therefore the amount of process water lifted is

$$A_2S = 0.8 A_1S$$

or four times the amount of power water released.

This means that the power water could be released into the process water and the pump will still pump a net of $(0.8 - 0.2)A_1S = 0.6A_1S$ per stroke.

Power Cylinder Concept

[0053] Values were manipulated to calculate the efficiency for various power cylinder arrangements. The manipulation required is:

- setting various ratios of A_2/A_1 ; from 0.4 to 0.82, then, for each of the ratios,
- setting the pressure in the power cylinder (P_c) during the recovery stroke,
- calculating the recovery stroke performance for various ratios of H_p/H_1 (the height of the pump compared to the height of the standing column),
- "optimising" H_p/H_1 , to obtain a recovery stroke acceleration of $2,4\text{m/sec}^2$ (8ft/sec^2), if possible,
- using the "optimised" results from the recovery stroke calculations as input for the power stroke calculations,
- calculating the power stroke performance for various ratios of P_2/P_1 ,

- "optimising". P_2/P_1 to obtain a power stroke acceleration of 2.4m/sec^2 (8 ft/sec^2),
- transferring the calculated efficiencies to another spreadsheet along with the "optimised" H_p/H_1 and P_2/P_1 ratios and the recovery stroke acceleration,
- using the calculated efficiencies to plot a graph of efficiency vs A_2/A_1 for the most significant ratios of P_2/P_1 .

[0054] The results indicate that high ratios of A_2/A_1 result in higher efficiency and lower ratios allow moving fluid to higher heads but using more process water or a larger power column if contained in a bladder or packer.

ATTRACTIVE APPLICATIONS

[0055] For the concept pump to be reasonably efficient, the ratio A_2/A_1 must be high. For this sort of pump to have a reasonable recovery stroke acceleration the power water in a pressure head style pump must be released very low relative to the height of the standing column. For this sort of pump to have a reasonable power stroke acceleration the power column must be very tall relative to the standing column. These features indicate that the pump would be attractive in applications where there is a source of power water at an elevation much higher than the standing column height. It must also be possible to release the power water at a very low elevation relative to the height of the power column in a pressure head style pump.

- the previously discussed run-of-the-river hydro booster application could fit these requirements, Analysis shows that this application allows the recovery of more than 55% of the energy of a high elevation tributary if it is channeled to a pressure head style pump placed at the bottom. The pump lifts almost five times as much water as is used to power the pump if the water is lifted $1/10^{\text{th}}$ of the height of the power head. The water is then recycled through the turbine at the bottom.
- using the pump to de-water a mine could also be attractive,
- raising water from a well could be attractive.
- raising water to a reservoir or to a higher elevation (pressure) could also be attractive

[0056] Another embodiment of the present invention is illustrated in figures 6a and 6b, wherein like parts have like reference numerals with the additional suffix ".2". Referring first to Figure 6a, a piston type pumping apparatus is shown indicated generally by reference numeral 20.2. The apparatus is intended to pump liquids, typically water, up relatively great vertical distances as exemplified by the distance between points 22.2 and 24.2.

[0057] There is a vertically oriented cylinder 26.2 having a top 28.2 and a bottom 30.2. A piston 40.2 is reciprocally mounted within the cylinder 26.2 and is connected to a vertically oriented, hollow piston rod 42.2 which extends slidably and sealingly through aperture 44.2 in the top 28.2 of the cylinder and aperture 48.2 in the bottom 30.2 of the cylinder. The piston 40.2 is annular in shape, in this example, has a surface area and divides the cylinder into two sections exemplified by cylinder space 27 below the piston and cylinder space 31 above the piston. The cylinder 26.2 has a diameter D_C and the hollow piston rod 42.2 has a diameter D_{FR} .

[0058] The piston rod 42.2 has a first portion 218 below the piston 40.2 and a second portion 220 above the piston. The first portion 218 extends slidably and sealingly through the aperture 48.2 and the second portion 220 extends slidably and sealingly through the aperture 44.2. It should be understood that Figures 6a and 6b are simplified drawings of the invention and seals and other conventional elements which would be apparent to someone skilled in the art are omitted.

[0059] There is a first one-way valve, indicated generally by reference numeral 41.2, at top 50 of the piston rod 42.2. Valve 41.2 has a valve member 43.2 and a valve seat 45.2 which extends about a first passageway 47.2 in the top 50 of the piston rod 42.2.

[0060] There is a reload chamber 46.2 adjacent bottom 30.2 of the cylinder 26.2 and is sealed with the cylinder apart from the aperture 48.2. The reload chamber 46.2 is in the form of a cylinder, in this example, and has a diameter D_{RL} . A second one-way valve indicated generally by reference numeral 56.2 is located at a bottom 57 of the reload chamber 46.2 and includes a valve member 58.2 and a valve seat 60.2 which extends about a second passageway 52.2 in the bottom of the reload chamber.

[0061] The second one-way valve allows liquid to flow from a source of liquid to be pumped below the apparatus 20.2 into the reload chamber 46.2 and into hollow piston rod 42.2, but prevents liquid from flowing from the reload chamber towards the source below.

[0062] There is a transfer chamber 200 adjacent the top 28.2 of the cylinder 26.2 and is sealed with the cylinder apart

from the aperture 44.2. The transfer chamber 200 is in the form of a cylinder, in this example, and has a diameter D_{TC} . The second portion 220 of the piston rod 42.2 acts as a piston within the transfer chamber 200. There could be a piston member on the end of the piston rod 42.2 within the transfer chamber 200 and the term "piston rod" includes this possibility.

[0063] The first one-way valve 41.2 allows liquid to flow into the transfer chamber 200 from the hollow piston rod 42.2 and from the reload chamber 46.2, but prevents a reverse flow into the hollow piston rod and reload chamber.

[0064] Since the transfer chamber 200 and the reload chamber 46.2 are above and below the cylinder 26.2 respectively, in this embodiment, the cylinder diameter D_C can be sized such that the piston rod diameter D_{PR} can be equal to or less than the diameters D_{TC} and D_{RL} of the transfer chamber 200 and reload chamber 46.2 respectively, and can also be sized such the diameter surface area 41.2 of the piston 40.2 is large enough for optimal pumping. The larger the diameter D_{PR} of the piston rod 42.2, the greater the volume of fluid that can be pumped by the apparatus 20.2. The greater the surface area 41.2 of the the piston 40.2 the greater the pumping force.

[0065] A third one-way valve indicated generally by reference numeral 202 is located at the top 204 of the transfer chamber 200 and includes a valve member 206 and a valve seat 208 which extends about a third passageway 210 in the top of the transfer chamber. There is a discharge chamber 212 above and adjacent to the transfer chamber 200 and is sealed with the transfer chamber apart from the third one-way valve 202. The third one-way valve 202 allows liquid to flow from the transfer chamber 200 into the discharge chamber 212, but prevents a reverse flow of liquid from the discharge chamber into the transfer chamber.

[0066] A fourth passageway 214 is located in the bottom 302 of the cylinder 26.2 and a fifth passageway 216 is located in the top 28.2 of the cylinder. The fourth and fifth passageways 214 and 216 allow a flow of pressurized liquid into and out of the cylinder spaces 31 and 27 respectively as will be explained below. Typically, the fourth and fifth passageways 214 and 216 respectively would be connected to a source of pressurized liquid via respective conduits and respective valves.

[0067] In operation, the apparatus 20.2 is primed by filling the reload chamber 46.2, the hollow piston rod 42.2 and the transfer chamber 200 with fluid, typically water, and the piston is placed in its lowermost position next to bottom 30.2 of cylinder 26.2. The first, second and third one-way valves 41.2, 56.2 and 202 are closed.

[0068] During the power stroke, shown in Figure 6a, pressurized fluid is let into the cylinder space 27 through passageway 214. The pressurized fluid acts on the piston 40.2, causing it to rise from the bottom 30.2 towards the top 28.2.

[0069] The second portion 220 of the piston rod 42.2 rises upwardly through the aperture 44.2 and thereby creates an increased pressure in the transfer chamber 200 since the volume of space occupied by the second portion in the transfer chamber is increased.

[0070] The increased pressure in the transfer chamber 200 causes the valve member 43.2 of the first one-way valve 41.2 to remain firmly seated in its valve seat 45.2, such that liquid is prevented from flowing through passageway 47.2. The increased pressure also causes the valve member 206 of the third one-way valve 202 to rise off its seat 208, such that liquid is allowed to flow from the transfer chamber 200 into the discharge chamber 212.

[0071] The volume of liquid flowing from the transfer chamber 200 into the discharge chamber 212 is substantially equal to the increased volume occupied by the second portion 220 of the piston rod 42.2 in the transfer chamber.

[0072] Correspondingly, the first portion 218 of the piston rod 42.2 rises upwardly through the aperture 48.2, increasing the volume of space occupied by the reload chamber 46.2 and the hollow piston rod 42.2 combined. Since the first one-way valve 43.2 is closed, as discussed above, the pressure in the reload chamber 46.2 and in the hollow piston rod 42.2 is reduced.

[0073] The reduced pressure in the reload chamber 46.2 causes the valve member 58.2 of the second one-way valve 56.2 to rise off its seat 60.2, such that liquid flows from the source below into the reload chamber through passageway 52.2. The volume of liquid flowing from the source into the reload chamber 46.2 is substantially equal to the increase in total volume occupied by the hollow piston rod 42.2 and the reload chamber 46.2 combined, such that the pressure is equalized between the source, the reload chamber and the hollow piston rod.

[0074] During the power stroke the piston 40.2 continues to travel until it reaches the top 28.2 of the cylinder 26.2. The increase in the total volume of space occupied by the hollow piston rod 42.2 and the reload chamber 46.2 is equal to the decrease of volume occupied by fluid in the transfer chamber 200. The decrease in volume of fluid in transfer chamber 200 is equal to increase in the volume of space occupied by the second portion 220 of the piston rod in the transfer chamber 200.

[0075] Referring now to Figure 6b, during the recovery stroke pressurized fluid is let into the cylinder space 31 through passageway 216. The pressurized fluid acts on the piston 40.2 such that it is deflected downwards from the top 28.2 of cylinder 26.2 towards the bottom 30.2. Simultaneously, pressurized fluid from space 27 is released through passageway 214.

[0076] Initially during the recovery stroke, with the first one-way valve 41.2 closed and the third one-way valve 202 open, the pressure in the transfer chamber 200 is decreased since the volume of space occupied by the second portion 220 of the piston rod 42.2 is decreased. This decrease in pressure causes the valve member 206 of the third one-way valve 202 to seat itself on seat 208 which thereby prevents any fluid from the discharge chamber 212 from flowing

through passageway 210 into the transfer chamber 200.

[0077] Similarly, during the initial period of the recovery stroke with the first one-way valve 41.2 closed and the second one-way valve 56.2 open, the pressure in the reload chamber 46.2 is increased since the total volume of space occupied by the piston rod 42.2 and the reload chamber is decreased while the volume of fluid therein remains at first constant. This increased pressure causes the valve member 58.2 of the second one-way valve 56.2 to seat itself on seat 60.2 which thereby prevents any fluid from the reload chamber 46.2 and the hollow piston rod 42.2 from flowing through passageway 52.2 into the source.

[0078] Once the second one-way valve 56.2 closes, the total volume of fluid in the space defined by the reload chamber 46.2, the hollow piston rod 42.2 and the transfer chamber 200 remains constant. During this period of the recovery stroke, with the first one-way valve 41.2, the second one-way valve 56.2 and the third one-way valve 202 closed, the volume of space occupied by the second portion 220 of the piston rod 42.2 in the transfer chamber 200 is reduced as the piston 40.2 travels towards the bottom 30.2 of cylinder 26.2 which causes a reduced pressure in the transfer chamber. A simultaneous increase in pressure occurs in the volume of space contained within the reload chamber 46.2 and the hollow piston rod 42.2.

[0079] The decrease in pressure in the transfer chamber 200 and increase in pressure in the hollow piston rod 42.2 and the reload chamber 46.2 causes the valve member 43.2 to rise off its seat 45.2, allowing the fluid to flow from the reload chamber and hollow piston rod into the transfer chamber to equalize the pressure.

[0080] The recovery stroke ends with the piston 40.2 next to bottom 30.2 of cylinder 26.2 and with the transfer chamber 200, the hollow piston rod 42.2 and the reload chamber 46.2 filled with liquid. The apparatus 20.2 is then ready for another power stroke. This cycle of a power stroke followed by a recovery stroke is alternately repeated during the operation of the apparatus 20.2.

[0081] An advantage of the present embodiment is obtained by the novel use of the third one-way valve 202 which prevents liquid in the discharge chamber 212 from reentering the transfer chamber 200 during the recovery stroke. This improves the efficiency of the pump significantly since energy is not wasted re-pumping the same liquid.

[0082] Another advantage is due to the configuration of the reload chamber 46.2, the cylinder 26.2 and the transfer chamber 200. This configuration allows the piston rod diameter D_{PR} to be equal to or less than the diameters D_{RL} and D_{TC} of the reload chamber and transfer chamber respectively. The greater the piston rod diameter D_{PR} , the greater the volume of fluid that can be pumped by the apparatus 20.2. Furthermore, since the diameter D_C of the cylinder 26.2 is not bound by either the reload chamber 46.2 or the transfer chamber 200, the surface area 41.2 of the piston 40.2 can be made as large as necessary for an optimal pumping force. The greater the surface area 41.2 of the piston 40.2, the greater the force of the piston rod 42.2 acting on the water in the transfer chamber 200 for a given pressurized fluid on the piston through passageway 214.

Claims

1. A piston type pumping apparatus (20), comprising:

- a vertically oriented cylinder (26) having a top and a bottom, the bottom having a first aperture (44);
- a first passageway (32) for liquid in the cylinder (26) at the top thereof;
- a second passageway (34) for liquid in the cylinder (26) at the bottom thereof;
- a reload chamber (46) located below the cylinder (26) and having a second aperture located at the top thereof;
- a piston (40) reciprocally mounted within the cylinder (26) and having a top area against which pressurized liquid acts in a direction of movement of the piston (40);
- a hollow piston rod (42) connected to the piston (40) and extending below the piston (40) slidably and sealingly through the first aperture in the bottom of the cylinder and slidably and sealingly through the second aperture in the top of the reload chamber into the reload chamber (46), and having a third passageway for liquid to communicate with the reload chamber (46), the piston rod (42) having a smaller bottom area within the reload chamber (46) upon which pressurized liquid in the reload chamber (46) acts in the direction of movement of the piston (40) and piston rod (42) compared to the top area of the piston (40), so that liquid in the cylinder (26) acting on the piston when the apparatus is in use exerts a greater force on the top area of the piston (40) than liquid in the reload chamber (46) acting against the smaller bottom area of the piston rod (42);
- a first one-way valve (41) located in the third passageway which permits liquid to flow from the reload chamber (46) into and above the piston rod (42) and prevents liquid from flowing back through the piston rod (42) into the reload chamber (46);
- a fourth passageway for liquid extending from the reload chamber (46) to a source chamber (70);
- a second one-way valve (52) in the fourth passageway which permits liquid to flow from the source chamber (70) into the reload chamber (46) and prevents liquid from flowing from the reload chamber (46) towards the

source chamber (70); and,
 a receiver (80) connected to the second passageway (34) for storing pressurized liquid displaced below the piston (42), as the piston (42) moves downwardly, and to assist in raising the piston (42) and, accordingly, liquid contained within the piston rod (42), to pump liquid upwardly and through the first passageway.

2. The apparatus of Claim 1 wherein the receiver additionally comprises hydraulic liquid.
3. The apparatus of Claim 2 further comprising a pump connected to the receiver to raise the piston (40).
4. The apparatus of Claim 3, wherein the pump comprises a piston type pump.
5. The apparatus of Claim 4, wherein the pump is located above the second passageway (34).
6. The apparatus of Claim 3, wherein the pump comprises a centrifugal pump (128).
7. The apparatus of Claim 6 further comprising a fifth passageway (34.1) for liquid adjacent to the bottom of the cylinder (26), a first conduit (122, 126) connecting the fifth passageway (130) to the pump and a second conduit (132) connecting the second passageway to the body of liquid,
8. The apparatus of Claim 7 further comprising a third one-way valve (120) adjacent to the second passageway (130) in the second conduit (132).

Patentansprüche

1. Eine Kolbenpumpvorrichtung (20), aufweisend:

- einen vertikal ausgerichteten Zylinder (26) mit einem oberen Teil und einem unteren Teil, wobei der untere Teil eine erste Öffnung (44) hat;
- einen ersten Flüssigkeitsdurchgang (32) in den Zylinder (26) an dessen oberem Teil;
- einen zweiten Flüssigkeitsdurchgang (34) in den Zylinder (26) an dessen unterem Teil;
- eine Nachladekammer (46), die unter dem Zylinder (26) angeordnet ist und eine zweite Öffnung hat, die an deren oberem Teil angeordnet ist;
- einen Kolben (40), der hin- und hergehend innerhalb des Zylinders (26) gelagert ist und der eine Kopffläche hat, auf welche eine unter Druck stehende Flüssigkeit in eine Bewegungsrichtung des Kolbens (40) wirkt;
- eine hohle Kolbenstange (42), die mit dem Kolben (40) verbunden ist und sich unter dem Kolben (40) verschiebbar und dicht durch die erste Öffnung in dem unteren Teil des Zylinders und verschiebbar und dicht durch die zweite Öffnung in dem oberen Teil der Nachladekammer in die Nachladekammer (40) erstreckt, und die eine dritten Flüssigkeitsdurchgang zum Kommunizieren mit der Nachladekammer (46) aufweist, wobei die Kolbenstange (42) verglichen mit der Kopffläche des Kolbens (40) innerhalb der Nachladekammer (46) eine kleinere Bodenfläche hat, auf welche unter Druck stehende Flüssigkeit in der Nachladekammer (46) in Bewegungsrichtung des Kolbens (40) und der Kolbenstange (42) wirkt, sodass Flüssigkeit in dem Zylinder (26), welche auf den Kolben wirkt, wenn die Vorrichtung in Verwendung ist, eine größere Kraft auf die Kopffläche des Kolbens (40) ausübt, als Flüssigkeit in der Nachladekammer (46), welche auf die kleinere Bodenfläche der Kolbenstange (42) wirkt;
- ein erstes Einwegventil (41), das in dem dritten Durchgang angeordnet ist und welches Flüssigkeit von der Nachladekammer (46) in die Kolbenstange (42) hinein und über die Kolbenstange (42) strömen lässt und verhindert, dass Flüssigkeit durch die Kolbenstange (42) zurück in die Nachladekammer (46) strömt;
- einen vierten Flüssigkeitsdurchgang, der sich von der Nachladekammer (46) zu einer Querkammer (70) erstreckt;
- ein zweites Einwegventil (52) in dem vierten Durchgang, das Flüssigkeit von der Querkammer (70) in die Nachladekammer (46) hinein strömen lässt und verhindert, dass Flüssigkeit von der Nachladekammer (46) in Richtung der Querkammer (70) strömt; und
- einen Aufnehmer (80), der mit dem zweiten Durchgang (34) verbunden ist, um unter Druck stehende Flüssigkeit zu speichern, die unter dem Kolben (42) verdrängt wird, wenn der Kolben (42) sich nach unten bewegt, und um beim Heben des Kolbens (42) und dementsprechend der innerhalb der Kolbenstange (42) enthaltenen Flüssigkeit mitzuwirken, um Flüssigkeit nach oben und durch den ersten Durchgang zu pumpen.

2. Die Vorrichtung nach Anspruch 1, wobei der Aufnehmer zusätzlich Hydraulikflüssigkeit aufweist.
3. Die Vorrichtung nach Anspruch 2, die zudem eine mit dem Aufnehmer verbundene Pumpe aufweist, um den Kolben (40) zu heben.
- 5 4. Die Vorrichtung nach Anspruch 3, wobei die Pumpe eine Kolbenpumpe umfasst.
5. Die Vorrichtung nach Anspruch 4, wobei die Pumpe über dem zweiten Durchgang (34) angeordnet ist.
- 10 6. Die Vorrichtung nach Anspruch 3, wobei die Pumpe eine Kreislumpumpe (128) umfasst.
7. Die Vorrichtung nach Anspruch 6, die zudem einen fünften zum unteren Teil des Zylinders (26) benachbarten Flüssigkeitsdurchgang (34.1), einen ersten Kanal (122, 126), welcher den fünften Durchgang (130) mit der Pumpe verbindet, und einen zweiten Kanal (132) aufweist, welcher den Durchgang mit der Flüssigkeitsmasse verbindet.
- 15 8. Die Vorrichtung nach Anspruch 7, die zudem ein drittes zu dem zweiten Durchgang (130) benachbartes Einwegventil (120) in dem zweiten Kanal (132) aufweist.

20 Revendications

1. Dispositif de pompage de type à piston (20), comprenant :
 - 25 un vérin orienté verticalement (26) ayant un sommet et un fond, le fond ayant une première ouverture (44) ;
un premier passage (32) pour le liquide situé dans le vérin (26) au sommet de celui-ci ;
un deuxième passage (34) pour le liquide situé dans le vérin (26) au fond de celui-ci ;
une chambre de recharge (46) située en dessous du vérin (26) et ayant une deuxième ouverture située au
sommet de celle-ci ;
un piston (40) monté de sorte à aller et venir à l'intérieur du vérin (26) et ayant une zone de sommet contre
30 laquelle du liquide pressurisé agit dans un sens de mouvement du piston (40) ;
une tige de piston creuse (42) reliée au piston (40) et s'étendant en dessous du piston (40) de manière coulissante
et étanche à travers la première ouverture dans le fond du vérin et de manière coulissante et étanche à travers
la deuxième ouverture en haut de la chambre de recharge dans la chambre de recharge (40), et ayant un
35 troisième passage pour que le liquide puisse communiquer avec la chambre de recharge (46), la tige du piston
(42) ayant une zone de fond plus petite à l'intérieur de la chambre de recharge (46) sur laquelle le liquide
pressurisé dans la chambre de recharge (46) agit dans la direction de mouvement du piston (40) et de la tige
du piston (42) par rapport à la zone de sommet du piston (40), de sorte que le liquide dans le vérin (26) agissant
sur le piston lorsque le dispositif est en cours d'utilisation exerce une force plus importante sur la zone de
40 sommet du piston (40) que le liquide dans la chambre de recharge (46) agissant contre la zone de fond plus
petite de la tige du piston (42) ;
une première soupape de non-retour (41) située dans le troisième passage qui permet au liquide de s'écouler
de la chambre de recharge (46) à l'intérieur et au-dessus de la tige du piston (42) et empêche le liquide de
revenir à travers la tige du piston (42) dans la chambre de recharge (46) ;
45 un quatrième passage pour que le liquide sorte de la chambre de recharge (46) vers une chambre de source (40) ;
une seconde soupape de non-retour (52) dans le quatrième passage qui permet au liquide de s'écouler de la
chambre de source (70) dans la chambre de recharge (46) et empêche le liquide de s'écouler de la chambre
de recharge (46) vers la chambre de source (70) ; et
un récepteur (80) relié au deuxième passage (34) pour stocker le liquide pressurisé déplacé en dessous du
50 piston (42), lorsque le piston (42) se déplace vers le bas, et pour assister la montée du piston (42), et en
conséquence, du liquide contenu à l'intérieur de la tige du piston (42), pour pomper du liquide vers le haut et
à travers le premier passage.
2. Dispositif selon la revendication 1, dans lequel le récepteur comprend en outre un liquide hydraulique.
- 55 3. Dispositif selon la revendication 2, comprenant en outre une pompe reliée au récepteur pour soulever le piston (40).
4. Dispositif selon la revendication 3, dans lequel la pompe comprend une pompe de type à piston.

EP 1 714 031 B1

5. Dispositif selon la revendication 4, dans lequel la pompe se trouve au-dessus du deuxième passage (34).
6. Dispositif selon la revendication 3, dans lequel la pompe comprend une pompe centrifuge (128).
- 5 7. Dispositif selon la revendication 6, comprenant en outre un cinquième passage (34.1) pour le liquide adjacent au fond du vérin (26), un premier conduit (122, 126) reliant le cinquième passage (130) à la pompe et un second conduit (132) reliant le deuxième passage à la masse de liquide.
- 10 8. Dispositif selon la revendication 7, comprenant en outre une troisième soupape de non-retour (120) adjacente au deuxième passage (130) dans le second conduit (132).

15

20

25

30

35

40

45

50

55

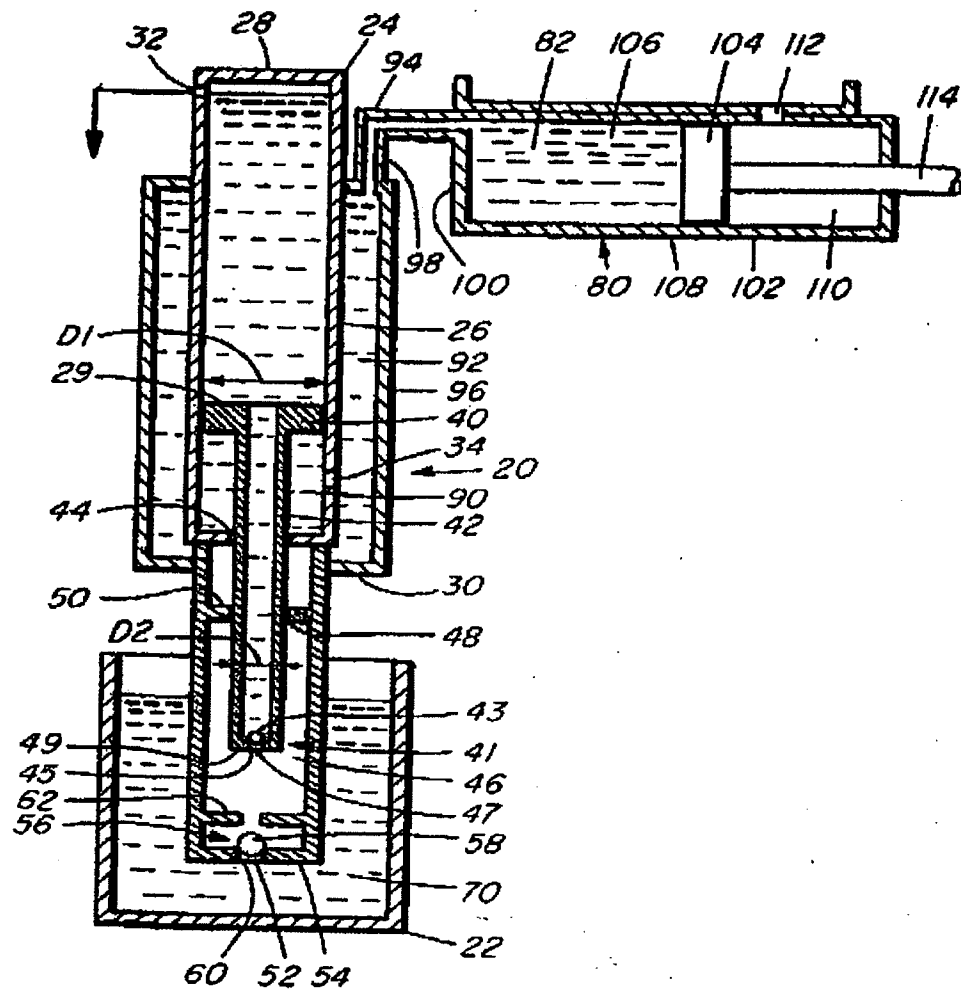


FIG. 1

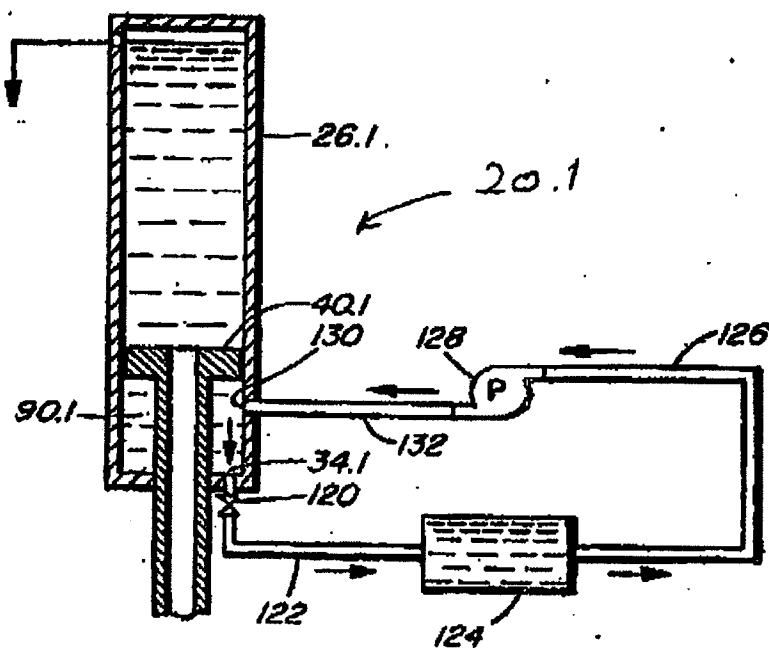


FIG. 2

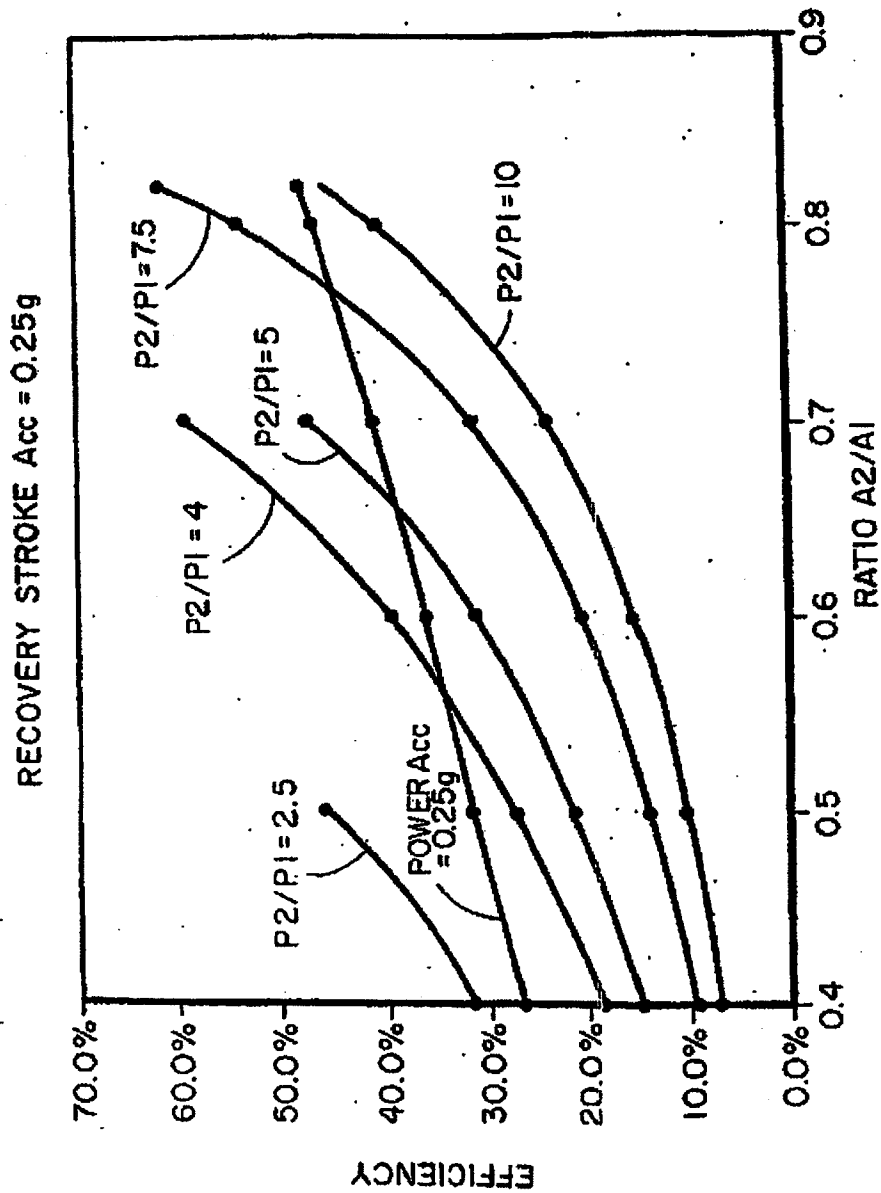


FIG. 3

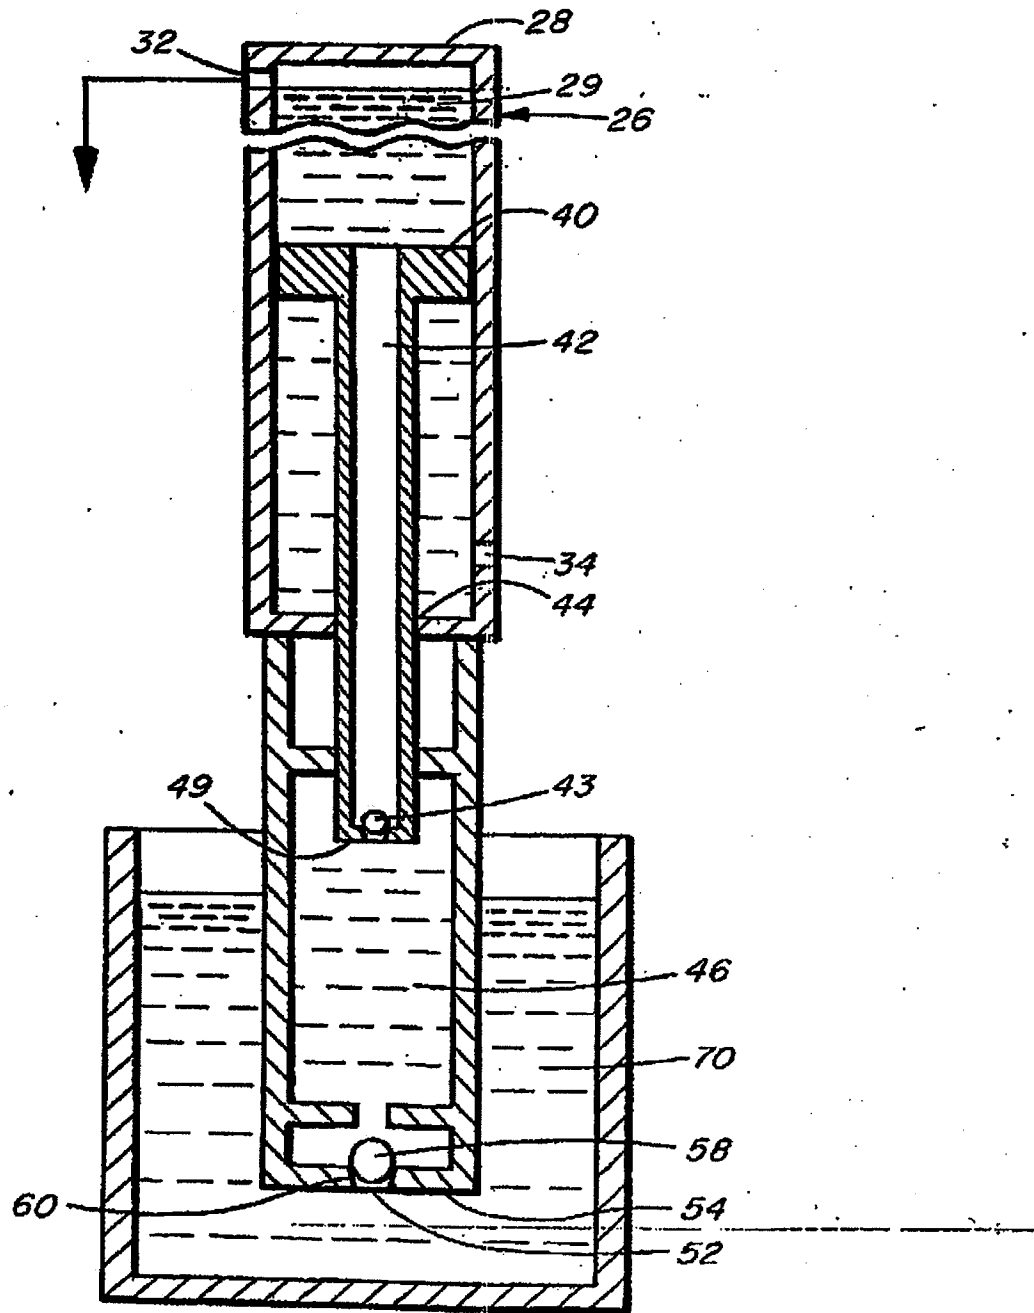


FIG. 4

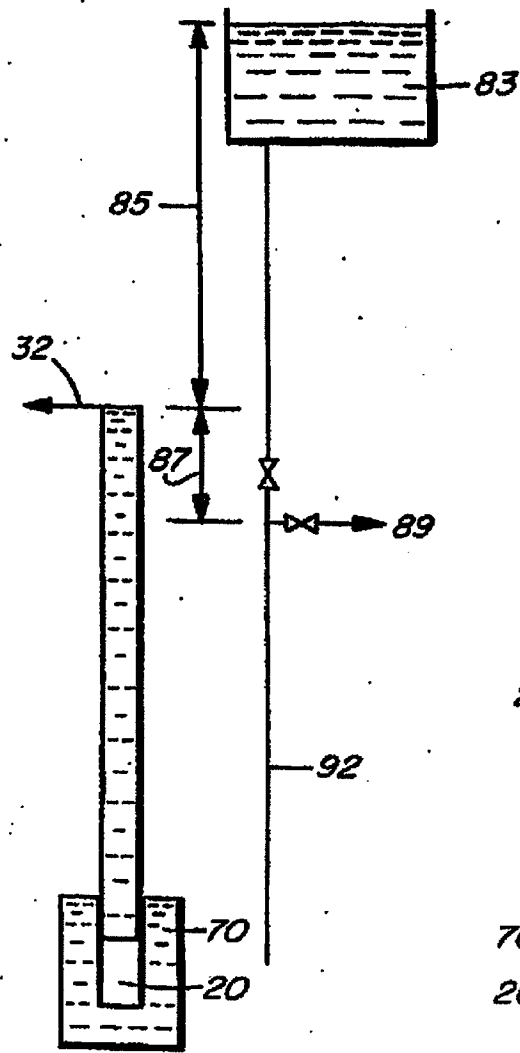


FIG. 5a

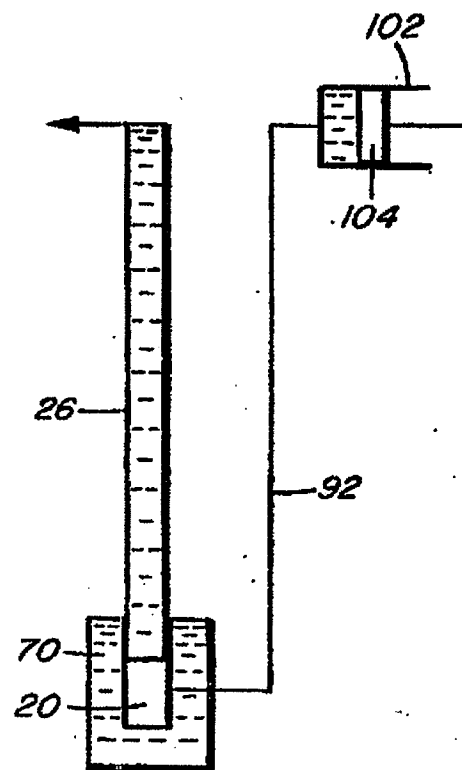


FIG. 5b

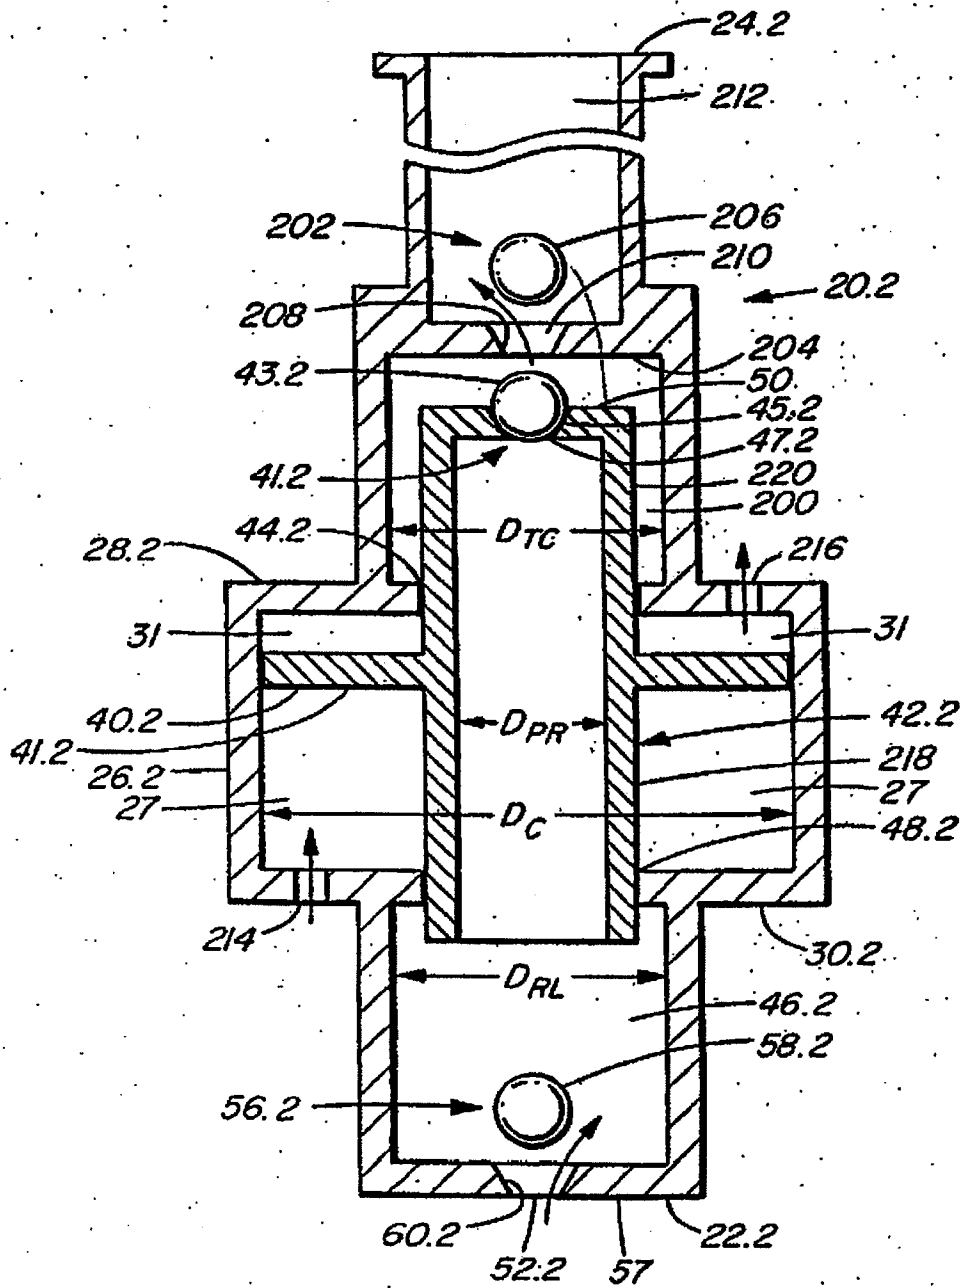


FIG. 6A

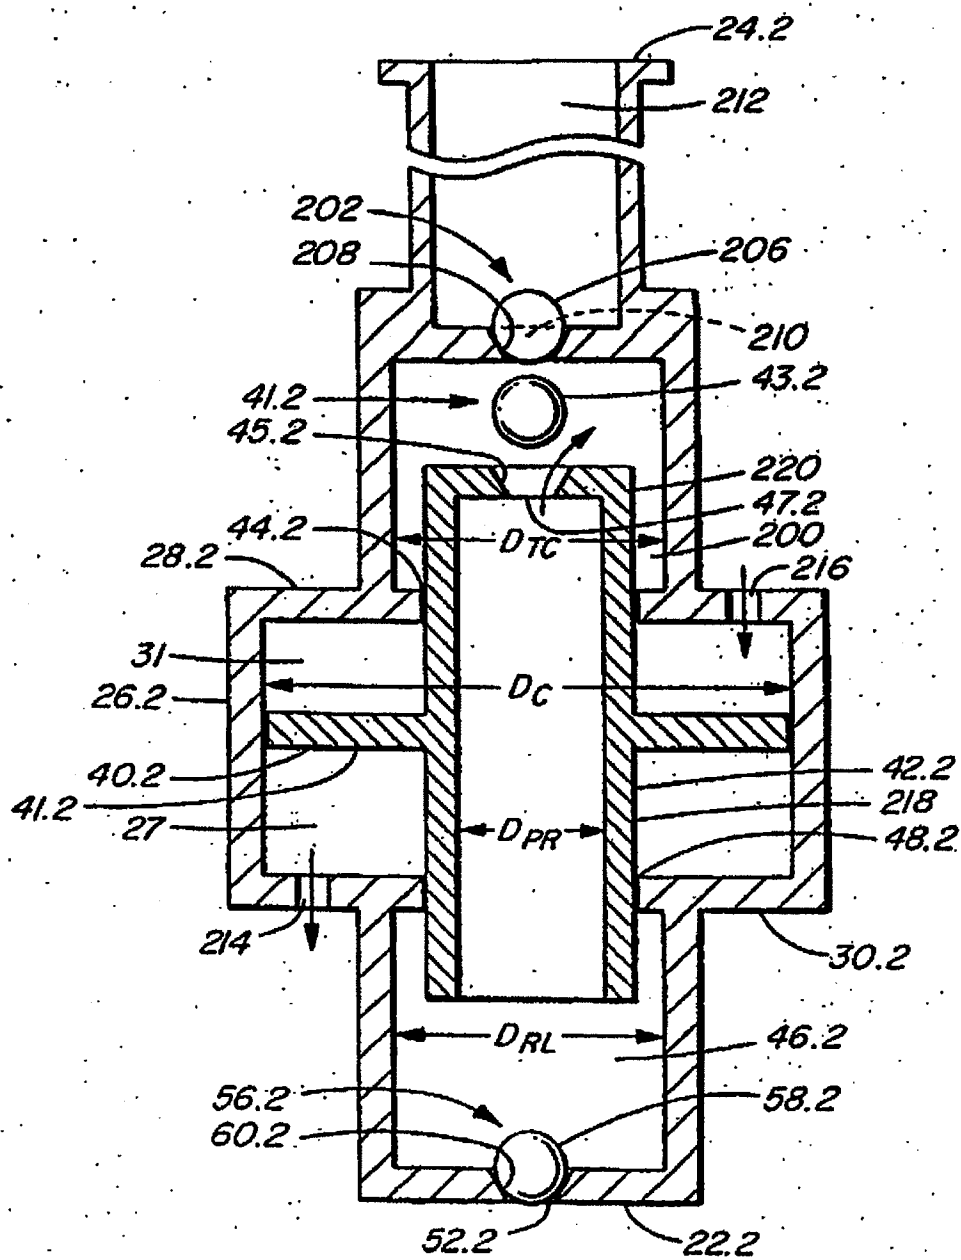


FIG. 6B

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 6193476 B, Sweeney [0003] [0013]
- US 4421463 A [0003]
- US 2174114 A [0003]